


9600 AREA LIGHT

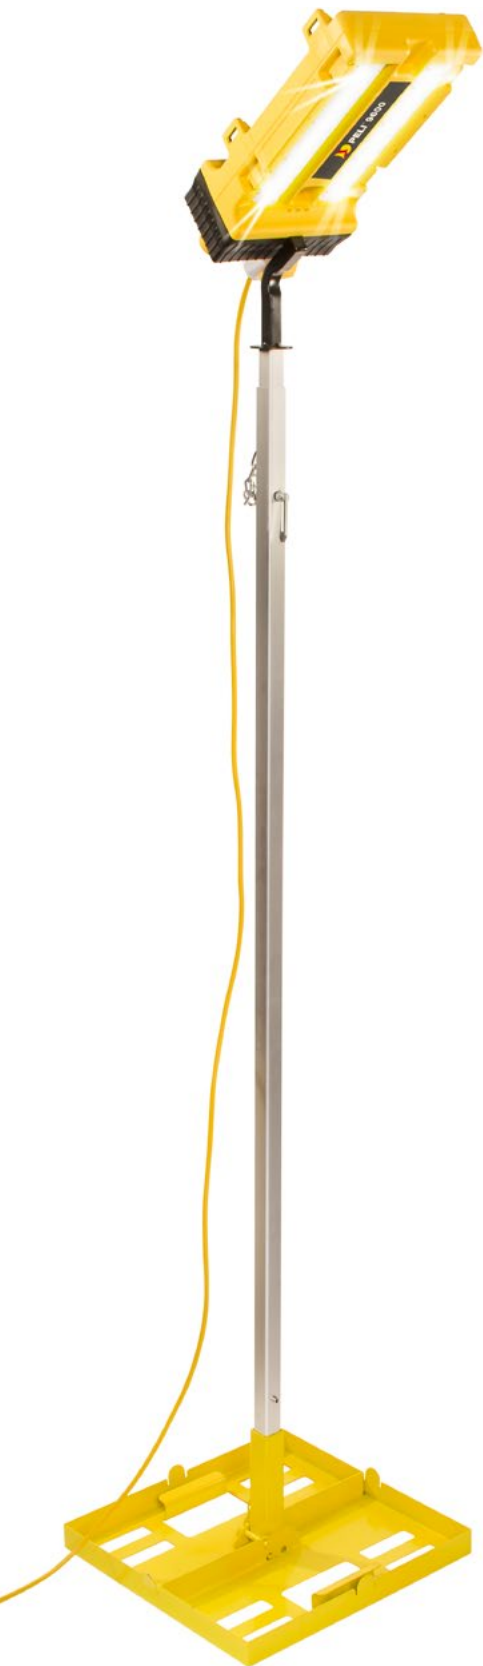

POWERFUL – Peli’s patented 110V linkable site light utilises specialist optics to harness and distribute 100% of the light in the most efficient pattern possible. This creates a much brighter overlap between lights when spaced at 10 metre intervals & has an adjustable light pattern.

COMPACT – Linkable and lightweight, with a small footprint and wide beam coverage. The 9600 is an extremely practical alternative to lighting towers for covering wide areas.

TOUGH – Built Peli tough for use in the harshest of applications. The 9600 draws on Peli’s rugged product DNA and features a durable waterproof design, with internal shock supports. Drop-tested to 3 metres.

EFFICIENT – The Interlocking Stack Pattern makes transportation and storage simple, whilst the highly efficient light engine requires less power, and therefore fewer generators compared to traditional lighting.

SAFE – A simple “Plug & Play” system, using common cables ensures quick and safe installation without specialist training. Sealed to IP67 for use in all weather environments, the 9600 also provides enhanced lux levels across a wide 10 metre span.

VERSATILE – Universal vertical/horizontal mounting option, for use with existing or Peli-supplied adjustable pole systems. Mount on fences/walls for access lighting, or suspend overhead in temporary shelters.

SPECIFICATIONS

Lumens:	3000
Lamp Heads:	1
Number of LEDs:	14
Light Mode:	Floodlight
Beam Spread:	180°
IP Rating:	67 (main body)

SIZE & WEIGHT

Dimensions:	460 x 210 x 130 mm
Maximum Height:	3000 mm
Weight:	3.82 kg (head only)

COLOUR



YELLOW

ACCESSORIES

Modular Light Base
Cable & Fittings
Modular Light Pole

